



more colour, better choices

Canon MP500 Additional Instructions.


The following instruction amendment sheet shows the way to fit the CIS system to the Australian MP500 Printers. The printed manual shows an IP4200 printer and the CISS tubing arrangement works more efficiently when installed as per this sheet.

Please use this amendment in addition to the existing instruction manual to assist you in installing the RIHAC CIS System.



Installed CISS system on a Canon MP500 series printer

- Step 1: Install the silicon seals to the print head as per the instruction manual.
- Step 2: Install the CISS system as per the IP4200 Manual provided in your CISS box
- Step 3: Attach the two black clips at the positions pictured below. The clips have a piece of double sided tape attached, simply remove the backing and attach. This will keep the scanner lid from crushing the silicone tubing.

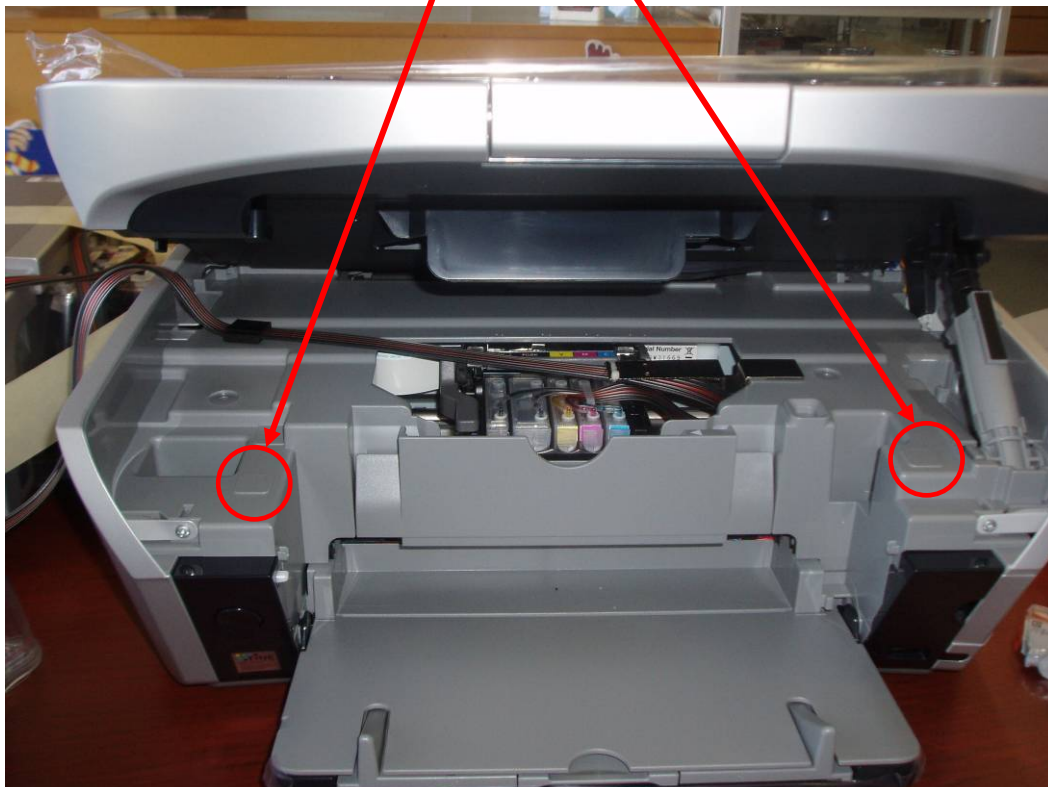

Step 4: Run the tubing as per the following photographs



Step 5: Close the scanner lid and check that the ink flow will not be restricted by the lid.

Step 6: Installed MP500 CISS system – Complete installation as per IP4200 Manual. Don't forget to remove the travel plugs and replace with the air filters or no ink will flow.